



A106 Gr.B Long Barrel seamless Nipple Fittings With SCH40 SCH80

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: DY-NIP-C15
- Minimum Order Quantity: 100PCS
- Price: USD0.5-USD3 each
- Packaging Details: carton box+ pallets
- Delivery Time: 7 days for stock items, 30 days for newly produced items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 100000pcs one month



Product Specification

- Thread: ANSI B.1.20.1 DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
- Thickness: Sch20, Sch40, Sch80, Sch120, Sch160, xs, Xxs, Customize
- Size: 1/4" To 6" 8MM-DN150MM
- Length: 1/2"-12" 15mm-300mm, Longer As Per Customize
- Material: A106GR.B, A53GR.B, API5L GR.B Stainless Steel
- Surface: Black, Sandblast, Pickling, Anti-rust Oil, Zinc Plated, Galvanized.
- Highlight: **Gr.B Nipple Socket, A106 Nipple Socket, SCH80 Long Barrel Nipple Fittings**

for more products please visit us on piping-industry.com

Product Description

A106 Gr.B Long Barrel Seamless Nipple Fittings With SCH40 SCH80

Seamless pipe Nipples are made from seamless pipes, the surface can be galvanized and black.

Wall thickness with Std. Sch. 40, XH Sch. 80, Sch. 160, XXH and size range from 1/8" to 6"

The American type meets the standard of ASTM A733, with NPT Tapered Pipe Threads as per ANSI B 1.20.1 Specification.

European Type meets the standard of BS EN10241, with BSPP/BSPT threaded as per BS21 ISO7/1

The Finish can be black, galvanized, and hot-dipped.


The black surface can be in two ways, phosphide or sandblast

The galvanized Surface can be electroplated or hot-dipped g.

The barrel Nipples also can be called steel pipe nipple, stainless steel pipe nipple, seamless pipe nipple, welded pipe nipple, galvanized pipe nipple, black pipe nipple, barrel Nipples, TEB nipples, TOE nipples, Steel Nipples. Long Nipples.

Product Information/Product Description/Basis Information/Specification

Products Name	A106 GR.B BARREL LONG SMLS NIPPLES WITH SCH40 SCH80
Types	Close Nipple, long nipple, barrel Nipple, Swage Nipples, TBE nipple, PLE nipple, TSE nipple, BLE nipple, TLE Nipple, PSE nipple
Size	1/8"-6"
Wall Thickness	SCH20 ,SCH30,STD,SCH40S,SCH60,XS,SCH80S,SCH100,SCH120,,SCH160S,X XS ,DIN, SGP JIS thickness
Connection	Threaded Ends NPT, BSPT, BSPP ANSI B1.20.1, BS21, DIN2999
Design Standard	ASTMA733 DIN2982 DIN2988 BS3187 EN10241:2000
Material Grade	Carbon Steel A106GR.B A53GR.B, ST37 RST37.2
	Stainless Steel 304, 304L, 304H, 316, 316L, 316H, 310, SS321, SS321H, 347, 347H, 904L
	Duplex SS 2507, DSS2205, UNS31803 UNS32750, UNS32760
	1.4301, 1.4306, 1.4401, 1.4435, 1.4406, 1.4404, 1.4462, 1.4410, 1.4501
Surface	Black, Electric Galvanized, Cold Galvanized, Hot. Dipped Galvanized, zinc Plated

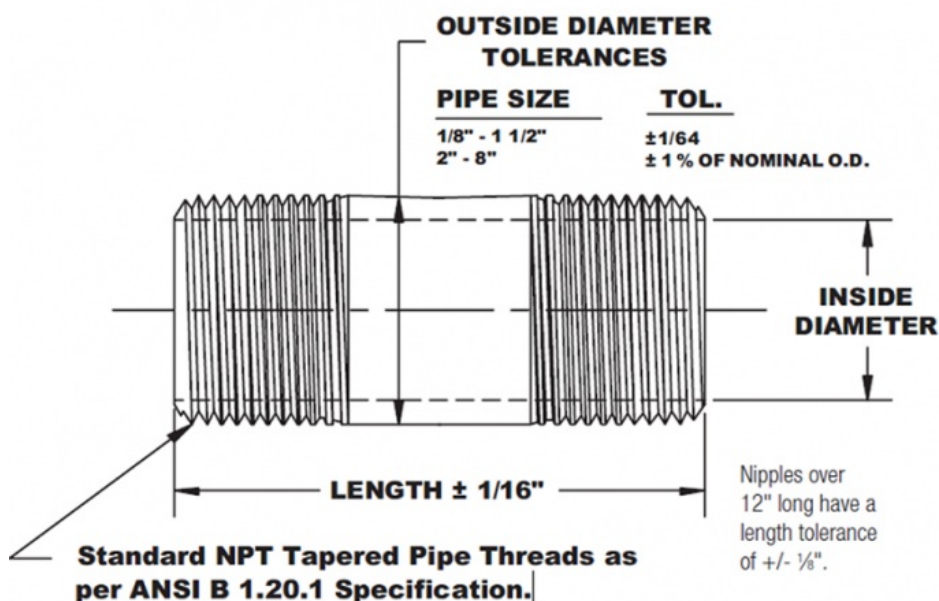

NPS	OD	L	Pipe Nipple Lengths													
in	in	in														
1/8	0.405	3/4	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12	

1/4	0.54	7/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3/8	0.675	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1/2	0.84	1 1/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3/4	1.05	1 3/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1	1.315	1 1/2		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1 1/4	1.66	1 5/8		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1 1/2	1.9	1 3/4		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
2	2.375	2			2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
2 1/2	2.875	2 1/2				3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3	3.5	2 5/8				3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
4	4.5	2 7/8						4	4 1/2	5	5 1/2	6	8	10	12
5	5.563	3							4 1/2	5	5 1/2	6	8	10	12
6	6.625	3 1/8							4 1/2	5	5 1/2	6	8	10	12

EN 10241:2000 BSPT BSPP

SIZE	Type 01				Type 02			
	OD	Thick	Length	Weight	OD	Thicknes s	Length	Weight
1/8"	14.0	2.7	17	0.023	15.000	3.200	19.000	0.018
1/4"	18.5	3.2	25	0.028	18.500	3.530	27.000	0.034
3/8"	21.3	3.2	26	0.032	22.000	3.530	28.000	0.041
1/2"	26.4	3.8	34	0.069	27.000	4.180	37.000	0.074
3/4"	31.8	3.8	36	0.092	32.500	4.190	39.000	0.104
1"	39.5	4.6	43	0.157	39.500	4.660	46.000	0.153
1-1/4"	48.3	4.7	48	0.240	49.000	5.020	51.000	0.240
1-1/2"	54.8	4.7	48	0.251	56.000	5.580	51.000	0.340
2"	66.3	4.8	56	0.388	68.000	5.670	60.000	0.501
2-1/2"	82.0	4.9	65	0.494	84.000	5.900	69.000	0.742
3"	95.0	5.0	71	0.615	98.000	6.540	75.000	0.957
4"	122.0	6.0	83	1.175	124.000	6.970	87.000	1.579
5"	147.0	6.0	92	1.530	151.000	7.760	96.000	2.306
6"	174.0	6.5	92	1.900	178	8.57	96	3.310

Features /Characteristics

Steel Pipe used for Schedules 40 & 80 welded nipples conforms to ASTM A53

Steel Pipe used for Schedule 80 nipples conforms to ASTM A106 Grade B

Both welded and seamless steel nipples conform to ASTM A733

NPT threads on all nipples conform to ASME B1.20.1

Independent lab verification that fittings meet applicable chemical & physical property

Application and usage:

Electric power, oil and gas, petrochemical, chemical, marine, heating,
Metallurgy

Reference Standards

ASME B16.9 Specification for Butt Welded Fittings

ASME B16.9 specification is designed for butt welded fittings applied in industrial construction pipelines. Including elbow, tee, cross, cap, reducer, and etc.

Standard Scope

The standard includes specifications of NPS 1/2 to NPS 48 (DN15-DN1200) factory-made wrought butt-welded pipe fittings overall dimensions, tolerances ratings, test methods and markings.

Special Fittings

Special fittings here refer to special sizes, forms and tolerances that agreed between buyer and manufacturer.

Fabricated Fittings

Fabricated laterals and other fittings by circumferential or intersection welds are considered pipe fabrication could not apply this standard.

Units under ASME B16.9 shall be stated in both SI (Metric) and U.S. Customary units. Designation for size is NPS.

Reference Standards

It is not considered practical to identify the specific edition of each standard and specification in the individual references. A product made comply with a prior edition of referenced standards and in all other respects conforming to this standard will be considered complied.

ASME B16.5: Pipe Flanges and Flanged Fittings: NPS 1/2 Through NPS 24 Metric/Inch Standard

ASME B16.25: For Buttwelding Ends

ASME B31: Code for Pressure Piping

ASME B31.3: Process Piping

ASME B36.10M, Welded and Seamless Wrought Steel Pipe

ASME B36.19M, Stainless Steel Pipe

ASME Boiler and Pressure Vessel Code

ASTM A234/A234M-17, Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service

ASTM A403/A403M-16, Specification for Wrought Austenitic Stainless Steel Piping Fittings

ASTM A420/A420M-16, Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Low Temperature Service

ASTM A815/A815M-14e1, Specification for Wrought Ferritic, Ferritic/Austenitic and Martensitic Stainless Steel Piping Fittings

ASTM A960/A960M-16a, Specification for Common Requirements for Wrought Steel Piping Fittings

ASTM E29-13, Practice for Using Significant Digits in Test Data to Determine Conformance With Specifications

ASTM B361-16, ASTM B363-14, ASTM B366/B366M-17: For other material metals. (Aluminum, Titanium, Nickel, and alloy).

Our Service

1. Technical support
2. Raw Material Quality control.
3. Inspection during the production time.
4. Final Test includes Surface, Dimension, PT Test, RT test, ultrasonic Test
5. Test Report each shipment
4. Flexible Delivery terms. EXW FOB CIF CFR DDP DDU
5. Flexible payment Ways: LC. TT. DP
6. Customized Package includes Logo. Cases Dimension.
7. 18 months quality Guarantee time.
9. Free replacement by air if any error founded
10. 24 hours to Feedback your questions



SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)



+8613292824811



sales@deyepiping.com



pipings-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China