

150# Investment casting theaded pipe fittings With Hose Nipple

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 10pcs
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T, L/C, D/P
- Supply Ability:



Product Specification

Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
Casting: Investment Casting
Material: 304/304L, 316/316L
Size: 1/4"-4"
Highlight: Threaded Pipe Fittings NPT, DIN 2999 Threaded Pipe Fittings,

316L Hose Nipple

China

DEYE

STH-TH-15

ISO9001:2015 PED

USD0.5-USD50 for each pc

7 days for stock items

100000PCS one month

Cartons+Ply-wooden cases, Pallets



More Images



150# Investment casting theaded pipe fittings With Hose Nipple

Hose Nipples with threaded x hose barb in 304 stainless steel and 316 stainless steel, can connect hose Pipes by one ends and connect stainless steel pipes in the other ends. A straight-type stainless steel hex socket hose nipple fitting (screw-in) from Kitz. The material is SCS13A (lost-wax). Stainless steel displays the same excellent corrosion-resistance and durability of chrome and nickel. The hose connection type is a bamboo-shoot shape and the connection screw type is R-shaped

Product Information/Product Description/Basis Information/Specification


i iouuot iiioiiiu	tion/Product Description/Basis information/Specification
Description	150# Investment casting theaded pipe fittings With Hose Nipple
Product name	threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee
Size	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"
Gasket	NBR, FKM
Thread	BSPT,BSPP, NPT,PS , DIN
Material	stainless steel201,202, stainless steel304, stainless steel 316
Casting Method	Investment precision casting, CNC machine
Application	Oil, Water, Industrial, Chemical
Test pressure	Usually 150PSI
Package	pcs/polybag, polybag/carton, cartons/pallet or according to your requirement
	1.OEM and Customized service can be provided
Advantages	2. With experience, quality guaranteed
nuvanayes	3. Approved by ISO9001:2015
	4. With independent open mold capacity, OEM supposed

Technology/ Technical Data Sheets

Reducing Coupling	Hex. Bushing	Hose Nipple	

SIZE		C1	C2	SIZE		C1	C2
D1	D2		02	D1	D2		
1/8"	-	-	-	1-1/4"	1/8"-1	44	26
1/4"	1/8"	27	18	1-1/2"	1/8"-1-1/4"	48	29.5
3/8"	1/8"-1/4"	34	19	2"	1/8"-1-1/2"	56	32
1/2"	1/8"-3/8"	36	22	2-1/2"	1/8"-2"	62	36.5
3/4"	1/8"-1/2"	35	24	3"	1/8"-2-1/2"	67	37.5
1"	1/8"-3/4"	40	27	4"	1/8"-3"	76	42

Production Process

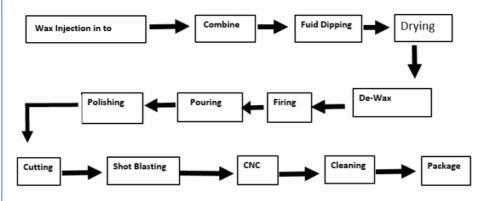

Common used Material Grade

SS316 Chemical Composition

ASTM A351 CF8M, SS316 Chemical Composition in %

ASTM A351 CF8M, SS316 Chemical Composition in %

		С	Mn	Р	S	Si	Ni	Cr	Мо
Min	I .						9.0	18.0	2.00
Max	х.	0.080	1.500	0.040	0.040	1.500	12.0	21.0	3.00

SS316 Mechanical Properties of the Fittings at room temperature

	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	30	
Max.				80

SS304 Chemical Composition

ASTM A351 CF8, SS304 Chemical Composition in %									
C Mn P S Si Ni Cr Mo									
Min.						8.0	18.0		
Max.	Max. 0.080 1.500 0.040 0.040 2.000 11.0 21.0 0.50								

SS304 Mechanical Properties of the Fittings at room temperature

		Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	35	
Max				

Application/ Usage: Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and lowpressure steam pipes.

SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)



No. 368 Youyi St. Shijiazhuang, Hebei, China